



- ✓ **OUTSTANDING FINANCE**
- ✓ **24 MONTHS WARRANTY**

## Professional Package



### FEATURES

#### Wheel Balancer

- Single phase 240V Electronic wheel balancer
- Strong and durable cabinet
- Stylish weight tray
- Technologies achieving a zero balance every spin
- Quick release clamping nut
- Accurate to 1g
- Full Alloy programme facility 4 programmes in total
- Bolts securely and safely to any concrete floor
- Bolts securely and safely to any concrete floor
- Automatic data input for wheel diameter and wheel offset on the shaft
- Self calibrating machine (Operator can calibrate periodically making sure of accurate tolerances)
- Set of 4 mounting cones as standard incorporating small four wheel drive cone as standard
- Rear cone mounting spring
- Heavy duty wheel rim width callipers
- Balance weight pliers as standard
- Wheel guard to protect
- Digital Display screen
- Full CE approval
- Motorcycle adaptor (Optional Extra)
- Maximum wheel weight 65kg
- Maximum wheel weight 65kg
- Rim diameter capability 10"-24"
- Rim width up to 20"
- Measuring time 8 seconds
- 3,4,5 universal flange plate adaptor (Centre less wheel adaptor) (Optional Extra)
- 24 months warranty\*

\*Terms & conditions apply


[www.valuegarageequipment.co.uk](http://www.valuegarageequipment.co.uk)

Order now on  
**0800 195 1245**



- ✓ **OUTSTANDING FINANCE**
- ✓ **24 MONTHS WARRANTY**

## Professional Package

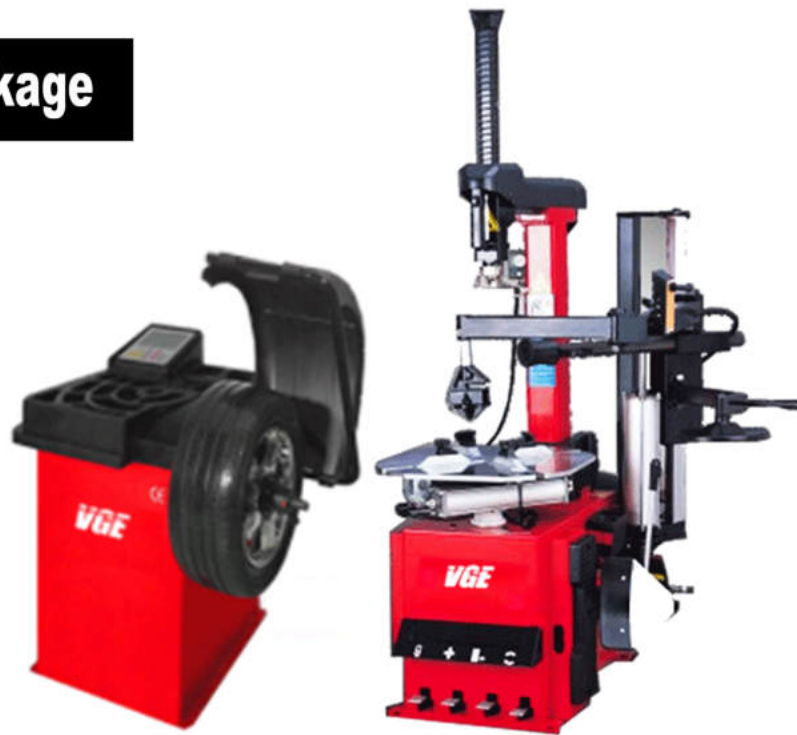

### TECHNICAL DATA

#### Wheel Balancer

- Max Wheel Weight - 65 kg
- Balancing Accuracy - +/- 1g
- Balancing / Shaft Speed - 200 rpm
- Rim Diameter - 10" - 24"
- Rim Width 1.5" - 20"
- Measuring Time - 8 secs
- Weight 122/98kg
- Display Screen - Digital LCD

### FEATURES

#### Tyre Changer

- Fully integrated power assisted arm for run flat & low profile tyres
  - Full jaw inflation (Enables the tyre to be inflated & bead sealed whilst being clamped on the turntable of the tyre changer) as standard
  - Standard – Semi professional machine
  - Semi automatic with tilting arm (Air operated)
  - Heavy & durable in construction
  - Plastic protection kit supplied as standard (jaw clamping, fitting head insert and bead breaker blade)
  - 2500Kg of bead breaker pressure
  - Heavy duty bead breaker blade
  - Strong bead breaker arm
  - Fully integrated filter regulator lubricator for quality air supply
  - Foot pedal operation
  - Full length abutment pad for breaking the bead of the tyre
  - Integrated tyre inflator
  - Heavy duty jaw clamp cylinders
  - 240V Electrical supply as standard (3phs optional extra available)
  - 24 months warranty\*
- \*Terms & conditions apply

### TECHNICAL DATA

- Power Supply - 240V (3 Phase available)
- Max. Wheel Width - 14"
- Inside Clamping - 12" - 24"
- Max. Weight Diameter - 41"
- Outside Clamping - 10" - 21"
- Air Supply - 8 Bar

[www.valuegarageequipment.co.uk](http://www.valuegarageequipment.co.uk)

Order now on  
**0800 195 1245**